


Safety: double security locks

Security locks on both ends prevent the awning from opening whilst driving. The locks automatically open when cranking out the awning. These locks are fitted to the Omnistor 5002, 5500 & 5800, 6002, 6502 & 6802. The Omnistor 2000 uses a manual locking system

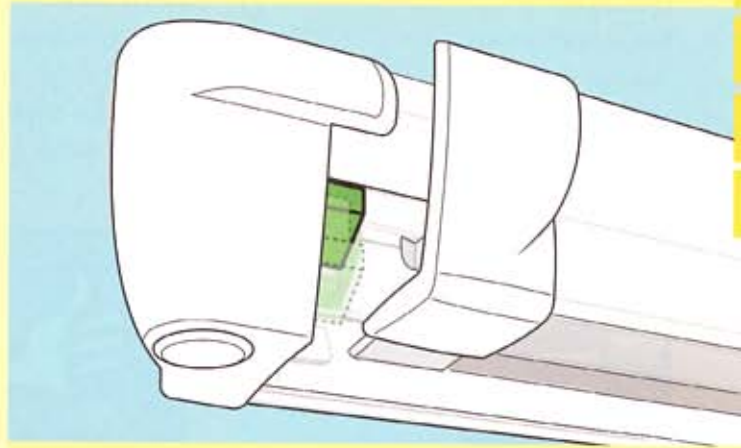

Omnistor top-quality awning fabric

All Omnistor PVC fabrics are non-fading, waterproof and washable, can be stored when wet, are high frequency welded and stitched with weather resistant yarn.

The Omnistor PVC fabric consists of 5 layers (not for the Omnistor Caravan style). The exterior layer on the top is a fully transparent protection layer –not an ordinary coating– which considerably increases the lifetime of the fabric.



Extreme stability

The monobloc, this is the arm support that connects the retractable arm to the box and is made of DURALUMINIUM (Si1).

In relation to the monobloc, the spring arms hinge horizontally as well as vertically. In this way, upward or downward movements of the awning are absorbed and apply no extra pressure to the vehicle wall! This unique system gives extreme stability to the Omnistor awning.



Extra sturdy because of double steel cables

Two rigid retractable arms (53mm high) with twin cables that can take twice as much pressure as the traditional arms (32kg instead of 16kg).

These cables ensure that an Omnistor awning is more wind resistant and has stronger fabric tension.

