

[www.motorcaravanning.co.uk](http://www.motorcaravanning.co.uk)

Standard installation is done by hooking the awning into the existing rail (A) or by means of an adapter set with counterplates, supplied as standard (B). Other adapters page 26 & 27




The feet of the support arms may be located into plastic brackets fixed to the vehicle wall (1) or to the ground (2) using the pegs supplied as standard.




Built-in 12V motors with emergency operation for the 5002 are available from 2,60m length upwards. The motor cannot be ordered as an option for an Omnistor 5002 without motor.

**Remark:** The awning is 16cm longer with the 12V motor.

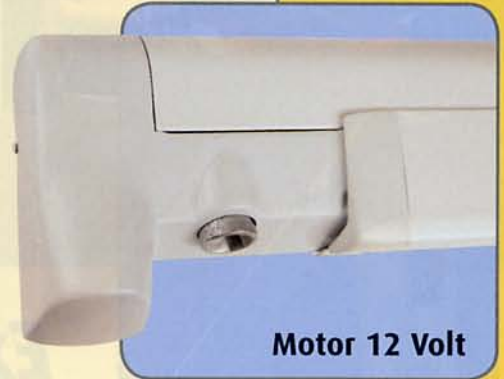

**Motor 12 Volt**

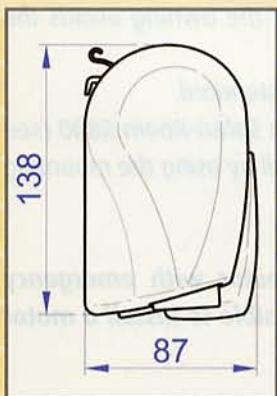

art.nr.	LENGTH	WITH MOTOR	PROJECTION	WEIGHT
040190**	1,90 m	-	1,40 m	14 kg
040230**	2,30 m	-	1,80 m	17 kg
04*260**	2,60 m	2,76 m	2,00 m	18 kg
04*300**	3,00 m	3,16 m	2,50 m	21 kg
04*350**	3,50 m	3,66 m	2,50 m	25 kg
04*400**	4,00 m	4,16 m	2,50 m	27 kg

\*0=manual , 1=motor \*\*colour code, see page 4&5