


The feet of the support arms may be located into plastic brackets fixed to the vehicle wall (1) or to the ground (2) using the pegs supplied as standard.


www.motorcaravanning.co.uk



Very quickly installed into the existing rail. See page 26 for supplementary rail profile and page 27 for additional adapters.

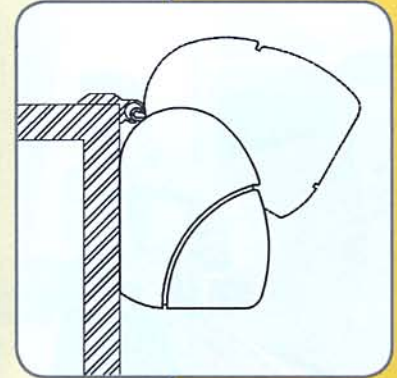

The Omnistor 2000 is the complete awning for caravans, smaller vehicles and motor vehicles. Installation can be done by using the VWT4 adapter with elevated roof (see page 26) or by using the Roof adapter Auto. **Adapters are optional.**

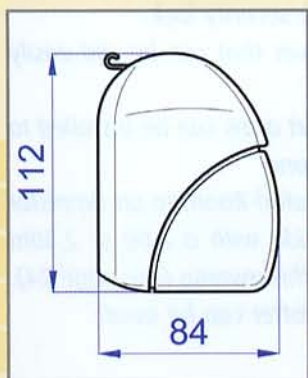

art.nr.	LENGTH	PROJECTION	WEIGHT
120190**	1,90 m	1,30 m	11 kg
120260**	2,60 m	2,00 m	14,5 kg
120300**	3,00 m	2,15 m	17,5 kg

**colour code: PVC 10-18-20-27, see page 4&5