


[www.motorcaravanning.co.uk](http://www.motorcaravanning.co.uk)

Very quickly installed into the existing rail.  
See page 26 for supplementary rail profile  
and page 27 for additional adapters.




## 1000

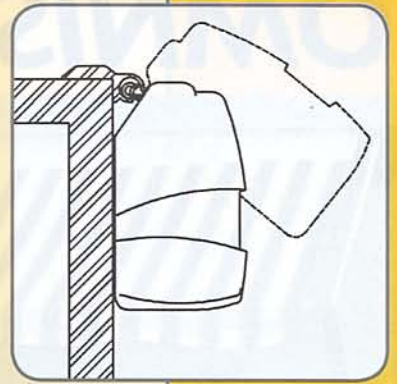

| art.nr.  | LENGTH | PROJECTION | WEIGHT |
|----------|--------|------------|--------|
| 11019018 | 1,90 m | 1,60 m     | 9 kg   |
| 11026018 | 2,60 m | 2,00 m     | 11 kg  |
| 11030018 | 3,00 m | 2,30 m     | 13 kg  |

colour code: 18 PVC (see page 4)

Also the Omnistor 1000  
can only be opened  
after unlocking  
the security catches.  
Safety has priority.

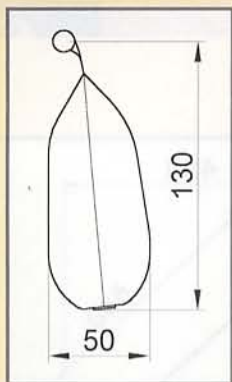

The Omnistor Caravan is slid into the caravan rail.  
The cover is opened by means of a zip.  
This awning can also be easily removed  
from your vehicle.



## CARAVAN

| art.nr.  | LENGTH | PROJECTION | WEIGHT |
|----------|--------|------------|--------|
| 130190** | 1,90 m | 1,60 m     | 5,5 kg |
| 130260** | 2,60 m | 2,00 m     | 8 kg   |
| 130300** | 3,00 m | 2,30 m     | 10 kg  |
| 130350** | 3,50 m | 2,30 m     | 13 kg  |
| 130400** | 4,00 m | 2,30 m     | 16 kg  |

\*\*colour code: 20 or 27 PVC (see page 4)

Supplied suction pads  
make sure the pressure  
of the tension rafters  
on a soft caravan wall  
is evenly distributed.

